AZZA VTA-240F II MIXER POWER AMPLIFIER




Functions

- 6 zones speaker output with individual volume control;
- Built-in MP3 player, support MP3 and WMA format, USB flash disk input port;
- Built-in FM tuner ;
- With Bluetooth wireless audio function;
- Built-in Chime and Siren ;
- 2 Aux, 3 Mic input and 1 Aux output;
- Mic 1 input has priority (Mute other audio input);
- Protect, Signal and Clip LED indicator;
- Volume control for each input and master output volume control;
- Treble and bass EQ control;
- 100V constant voltage output, 8 ohm fixed resistance output;
- 128*64 LCD display for MP3 and FM tuner operation;
- MP3 player can choose playback cycle mode: random, single loop, folder loop, all cycle.
- 5 EQ sound effector for MP3 player and FM tuner audio output;
- LCD screen can display Chinese and English song names, length and play time.

Specifications

Information	
Model	VTA-240 F II
Rated Power	240W
Mic Input	-60dB, 600Ω, unbalanced, 6.3mm TS port
Aux Input	-20dB, 10kΩ, unbalanced, Stereo RCA port
Aux Output	0dB, 600Ω, unbalanced, Stereo RCA port
Speaker Output	High Impendence: 100V, 70V; Low Impendence: 8Ω;
Protection	AC fuse, overheating, overvoltage, overcurrent, short, DC, and muting during power on protections
EQ for Master Output	Treble: ± 12dB at 10kHz; Bass ： ± 12dB at 100Hz
Frequency Response	20~20kHz (±3dB)
S/N	Microphone input >66dB; AUX input>75dB
T.H.D	<0.5% at 1kHz, at 1/3 rated power.
Power Source	220~240VAC, 50/60Hz
Power Consumption	350W at rated power
Weight	12kg
Temperature / Humidity	-10°C ~ +40°C, <95%
Dimensions	482(W) × 88(H) × 350(D) mm
Shipping Weight	14kg

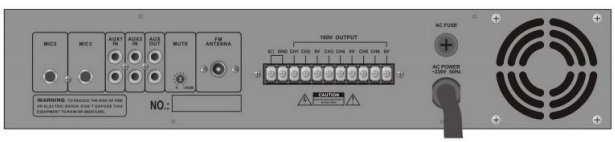

AZZA SALES(THAILAND) CO.,LTD
5 SOI BOROMMARATCHACHONNANI 81 CHIMPHLI ,TALINGCHAN
BANGKOK 10170 (THAILAND)
Tel : 092-635-6351 to 5
Email : info@azza.co.th
www.azza.co.th

Agent :